


Neutrakon® Neutralisator Type N170B
For condensate from gas-fired condensing boilers

Mommertz GmbH - Article-No.: 095135

Technical Data Sheet: 11-200-300

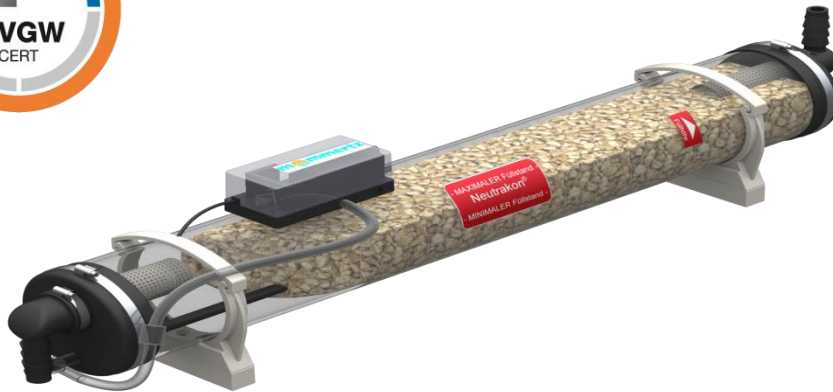

| | |
|--|---|
| Characteristics | Neutralizes condensates deriving from gas fired condensing boilers and flue gas systems |
| Nominal heat output of the upstream heat generator | Up to 170 kW |
| Max. condensate volume flow rate (0.14 l/ kWh) | 23,8 l/h |
| Fuel | Gas |
| Mating dimensions | DN40/DN20 |
| Installation dimension | L720(DN40) – 800 mm (DN20) |
| Diameter | Ø120 mm |
| Neutralizing Agent | Neutrakon® granules GN 7,4 kg |
| Max. Temperature | 60° C |
| Maintenance control | Min. 1x yearly |
| pH-value of condensate | >pH3 |
| Wight incl. packaging | 11 kg |
| Certification | DVGW according to VP114 for 2000 hours |

