


**Neutrakon® Neutralisator Type N300B**  
**For condensate from gas-fired condensing boilers**

Mommertz GmbH - Article-No.: 095140

Technical Data Sheet: 11-200-310

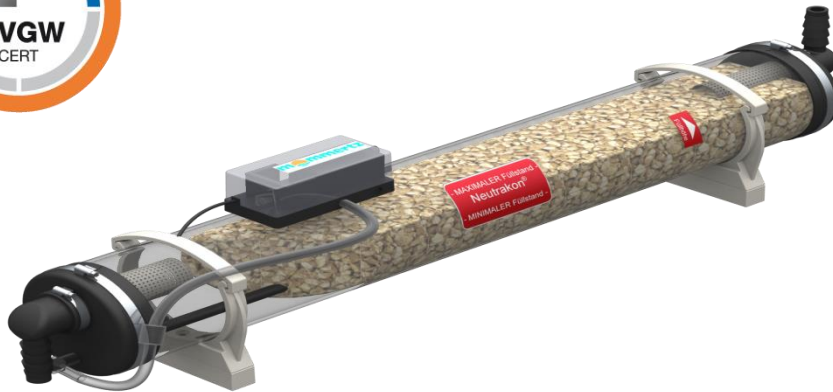

Characteristics	Neutralizes condensates deriving from gas fired condensing boilers and flue gas systems
Nominal heat output of the upstream heat generator	Up to 300 kW
Max. condensate volume flow rate (0.14 l/ kWh)	42 l/h
Fuel	Gas
Mating dimensions	DN40/DN20
Installation dimension	L1035(DN40) – 1140 mm (DN20)
Diameter	Ø120 mm
Neutralizing Agent	Neutrakon® granules GN 11 kg
Max. Temperature	60° C
Maintenance control	Min. 1x yearly
pH-value of condensate	>pH3
Wight incl. packaging	17 kg
Certification	DVGW according to VP114 for 2000 hours

