
# INTRODUCING THE ALL NEW CONDENSATE PUMP NEUTRAKON PRO SNP









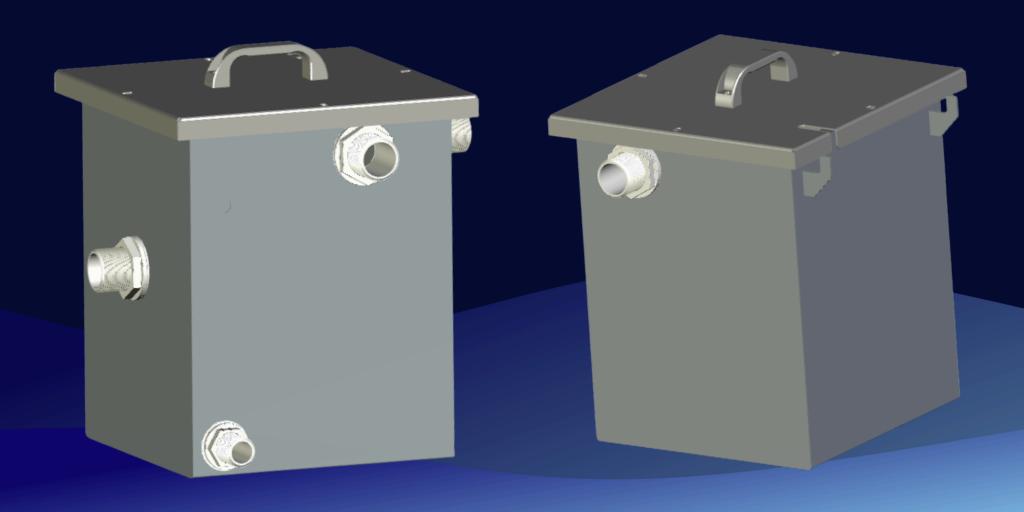

#### **NEUTRAKON PRO SNP - STAINLESS NEUTRA PUMP**

#### **EXCEPTIONAL CORROSION RESISTANCE**

- Excellent Corrosion Resistance
- For systems that produce aggressive condensate
- Ensuring that the pump remains permanently intact and functional, unlike plastic or standard metal housings.
- Stainless steel, for example, protects against chemical degradation, extending the pump's lifespan in harsh environments.

#### HIGH DURABILITY FOR HARSH CONDITIONS

- The stainless steel housing increases the pump's resistance to moisture and physical stress.
- Ideal for industrial environments, commercial HVAC systems, or outdoor installations
- The robust construction reduces the risk of cracks, leaks, or structural damage
- Reliable operation even in demanding applications

#### **AESTHETIC APPEAL AND PROFESSIONAL FINISH**

- Stainless steel housings offer a sleek, polished appearance that enhances the appearance of installations in upscale residential and commercial spaces.
- Unlike plastic or painted metal, stainless steel is resistant to fading, staining, and discoloration, thus maintaining its professional appearance over time.


#### **EASY MAINTENANCE AND INSTALLATION**


- Easy installation and maintenance
- The housing's durability ensures that external components remain intact during maintenance, while its wear resistance minimizes the need for frequent cleaning or repairs.







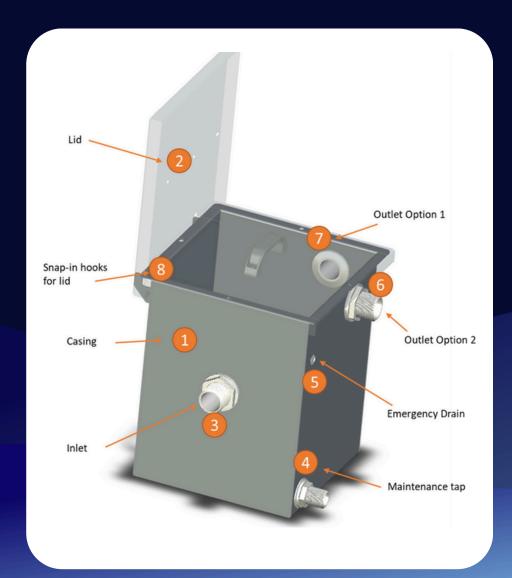


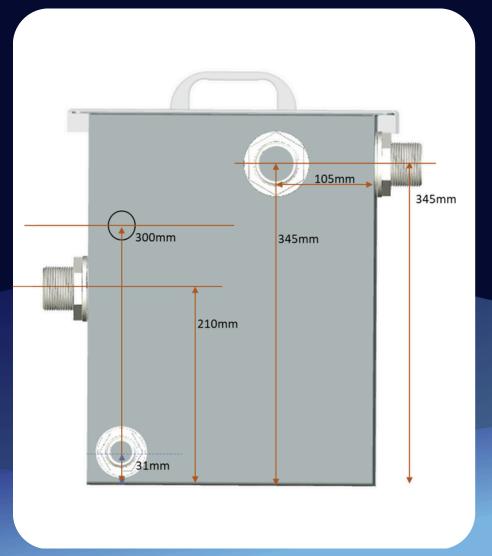







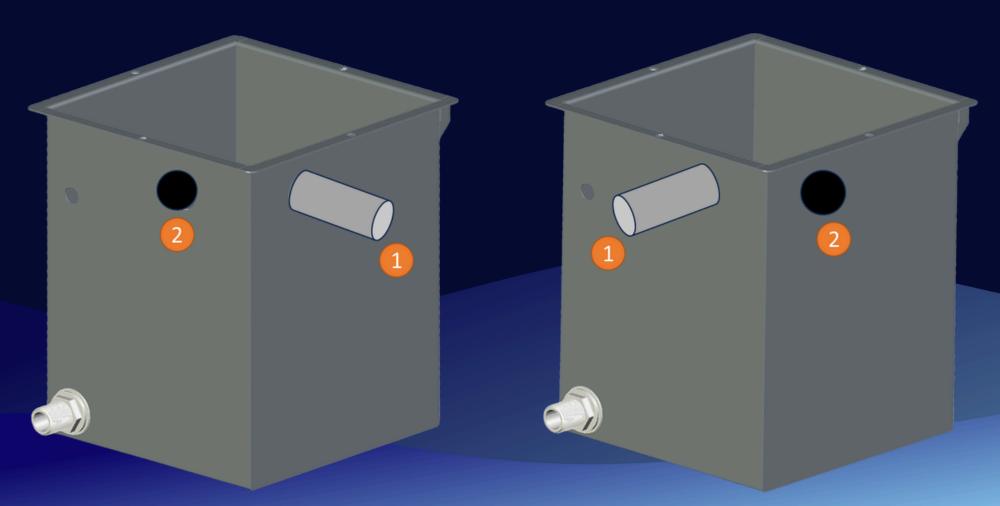


flexible installation with 2 different options outlets




























For outdoor installation: heating cable optional



### **Neutrakon Pro SNP**




**NEUTRAKON PRO SNP - CAN BE COMBINED WITH OTHER PRODUCTS IN THE SN SERIES** 




FLOOR FRAME FOR NEUTRAKON PRO SNP

Article number: 097046











# **Condensate pump**



TECHNICAL DATA	
Suited for	Condensates from CHP's, chimneys
Weight Housing	10kg
Weight pump system	5kg
Cable length	10m
Rated current	1,6A
Voltage/Frequency	1x 230V / 50Hz
Protection	IP68
Max. Lift	6m
Maximum flow rate	8,5m³/h
Motor protection temperature switch	120°C
Dimensions (length, width, heigth)	350mm; 350mm, 400mm
Inlet	1 ½"
Inlet height	210mm
Membrane bushing at outlet	5/4"
Outlet	1 ½"
Outlet height (Option 1 and 2)	345mm
Heigth emergency drain	300mm
Emergency drain	½" outer thread
Maintenance valve	1" outer thread
Article number	098050
Power supply	230V
Protection	IP67
Cable	1m (heated)
Range Thermostat	On at +3°C; off at +13°C
Article number	098051







### FOR MORE INFORMATION, PLEASE CONTACT:

Mommertz GmbH Lerchenweg 4 89176 Asselfingen

+49 (0) 7345 2100 160 info@mommertz.de

Gesellschaft für Abgastechnik mbH Dieselstrasse 44 63165 Mühlheim

+49 (0) 6108 69061 info@gfa-abgastechnik.de



